


## Technical specifications:

### Tracless Speed Folding Gate VV SG 22

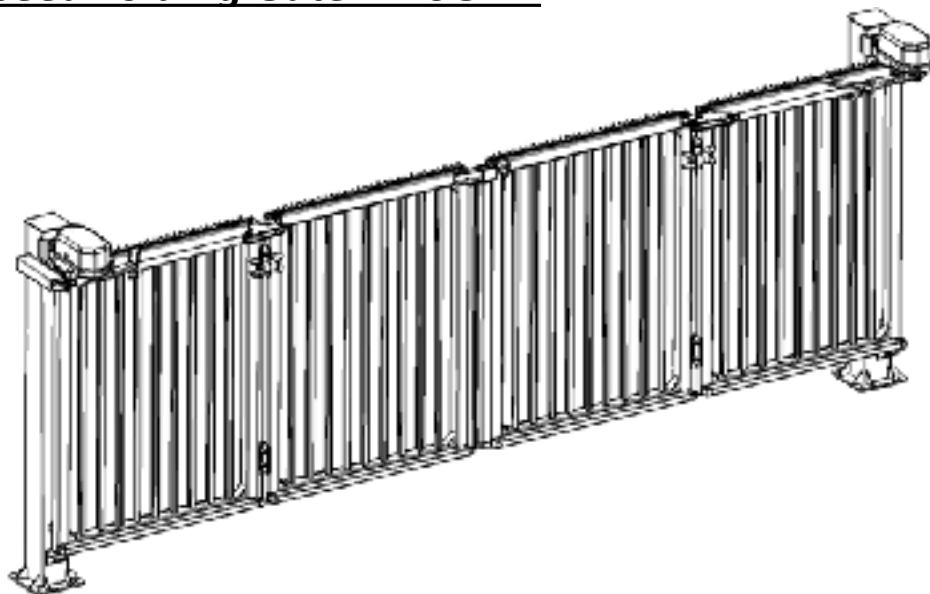

#### Technical specifications:

<b>Clear opening width:</b>	4 000 - 7 000 mm,
<b>Gate height:</b>	Up to 3 500 mm
<b>Frame profile:</b>	Square hollow section 60x60mm, 80x60 mm, 80x80 mm
<b>Column profile:</b>	Square hollow section 200x200 mm with base plate to bolt on
<b>Material:</b>	Steel, aluminium, stainless steel
<b>Colours:</b>	Different colours available on request
<b>Infill:</b>	Vertical square bars 25 x 25 mm or 30 x 30 mm, welded mesh
<b>Drive:</b>	DAAB's MK/MT type electric drive 0,37kW, 3-phase, 400V, 50 Hz.
<b>Supply voltage:</b>	230V (1Ph + N + PE), 50 Hz
<b>Control unit:</b>	DAAB automatic control unit EP-105, installed in the cabinet rated IP65
<b>Control devices (Standard)</b>	1 no. key switch OPEN / STOP / CLOSE in right or left drive post
<b>Control devices (Optional)</b>	Induction loops, additional light beam in light beam posts at HGV height, additional key switch OPEN/ CLOSE / STOP, key switch OPEN / CLOSE / EMERGENCY STOP, key switch ON / OFF for automatic closing etc., key switch partial opening, key switch fire brigade, remote control with hand held transmitter, table top push button, timer, code key pad, card reader, intercom system
<b>Signalling devices (Optional)</b>	Flashing permanent light or rotating beacon (LED), LED spot light, traffic light
<b>Open/close time</b>	Approx. 8 s
<b>Emergency operation:</b>	By manual release of drive arm in case of power failure
<b>Safety devices:</b>	Safety edges, photocells
<b>Temperature range</b>	Drive -45 � ... +50 �, Controller unit in heated cabinet -45 � ... +50 �
<b>Finish (Standard)</b>	Hot-dip galvanised and powder-coated with RAL colours
<b>Certification</b>	CE certified